


# SINGLE PHASE BLOWERS

Aluminium construction, smooth airflow and maintenance free operation. Our industrial single phase blowers range from 0.55kW to 1.5kW with flowrates up to 150m<sup>3</sup>/hr.

We recommend replacing the inlet filter every 12-24 months depending on condition.

Can be supplied "ready to go" with inlet filter, pressure relief valve protection and hosetail.


Other models/sizes available upon request.

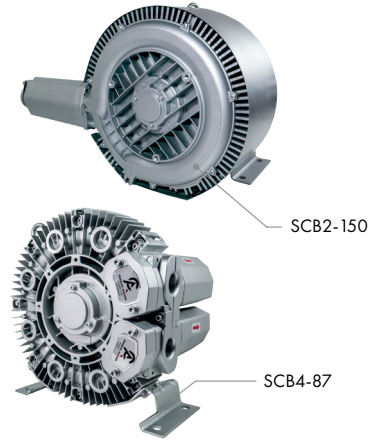

## Key Features



Model	kW Rating	Voltage	FLC (A)	Freeflow	Max Δ P	Port size
SCB4-47-0.55kW-1PH	0.55kW	230V	3.0	47m <sup>3</sup> /hr	290mbar(g)	1 1/4" BSP
SCB2-100-0.7kW-1PH	0.7kW	230V	4.8	100m <sup>3</sup> /hr	150mbar(g)	1 1/4" BSP
SCB2-145-0.8kW-1PH	0.8kW	230V	5.2	145m <sup>3</sup> /hr	160mbar(g)	1 1/2" BSP
SCB4-66-0.94kW-1PH	0.94kW	230V	9.0	66m <sup>3</sup> /hr	350mbar(g)	1 1/4" BSP
SCB4-87-1.1kW-1PH	1.1kW	230V	10.1	87m <sup>3</sup> /hr	380mbar(g)	1 1/4" BSP
SCB2-150-1.5kW-1PH	1.5kW	230V	9.0	150m <sup>3</sup> /hr	290mbar(g)	1 1/2" BSP

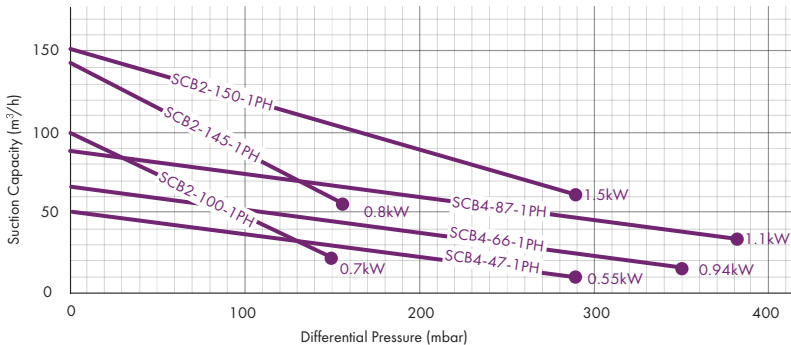

enviro® SCB Series